

Fig. 1

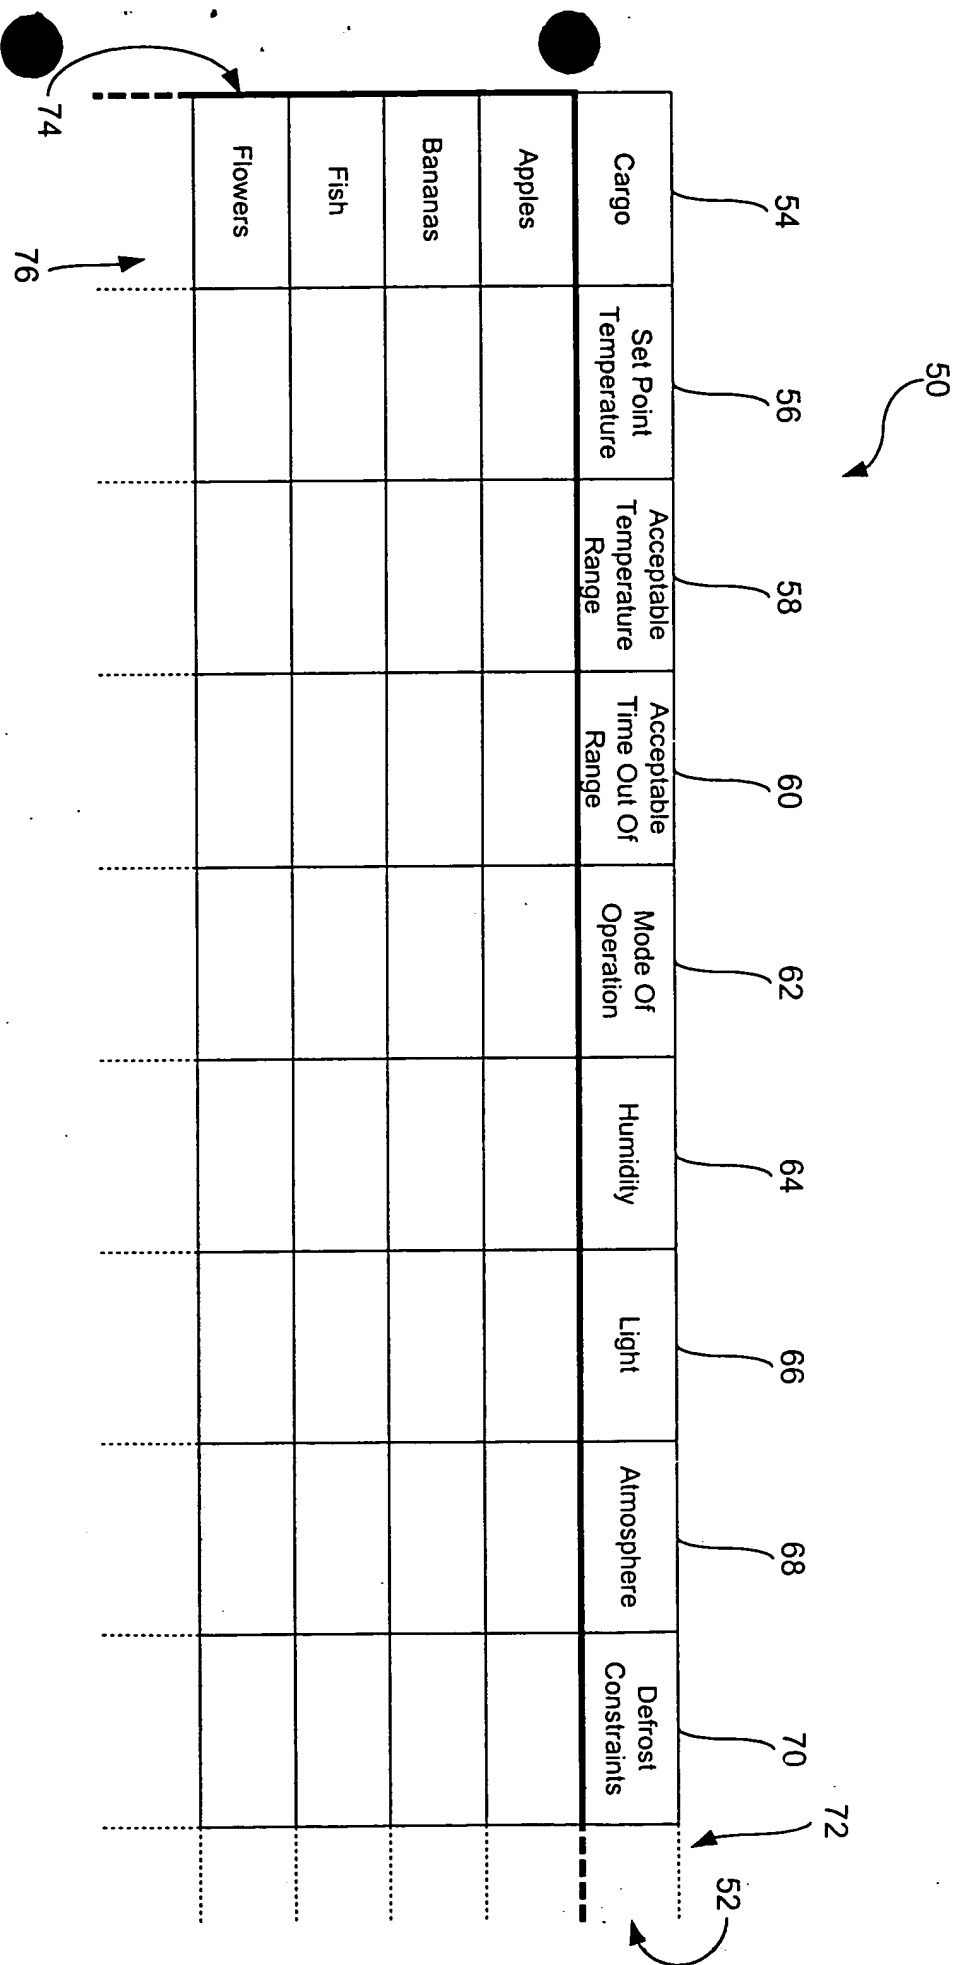


Fig. 2

FIG. 2 is a schematic diagram of a table structure (50) with columns and rows. The columns are labeled: Cargo, Set Point Temperature, Acceptable Temperature Range, Acceptable Time Out Of Range, Mode Of Operation, Humidity, Light, Atmosphere, and Defrost Constraints. The rows are labeled: Apples, Bananas, Fish, and Flowers. Arrows 52 and 74 point to the top and bottom of the table respectively.

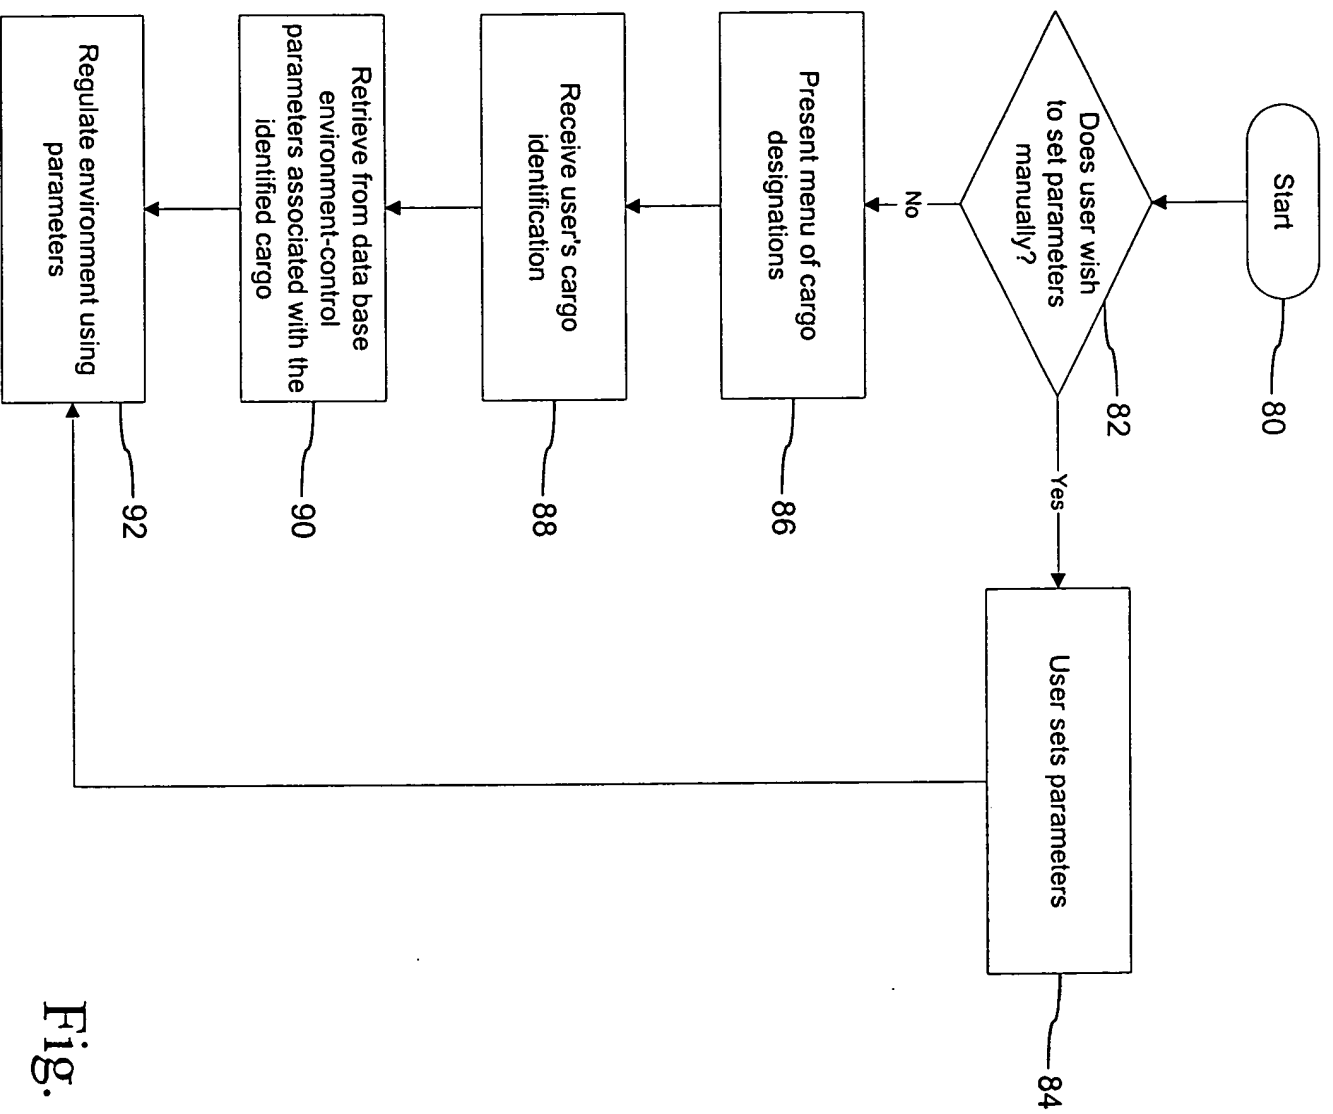


Fig. 3

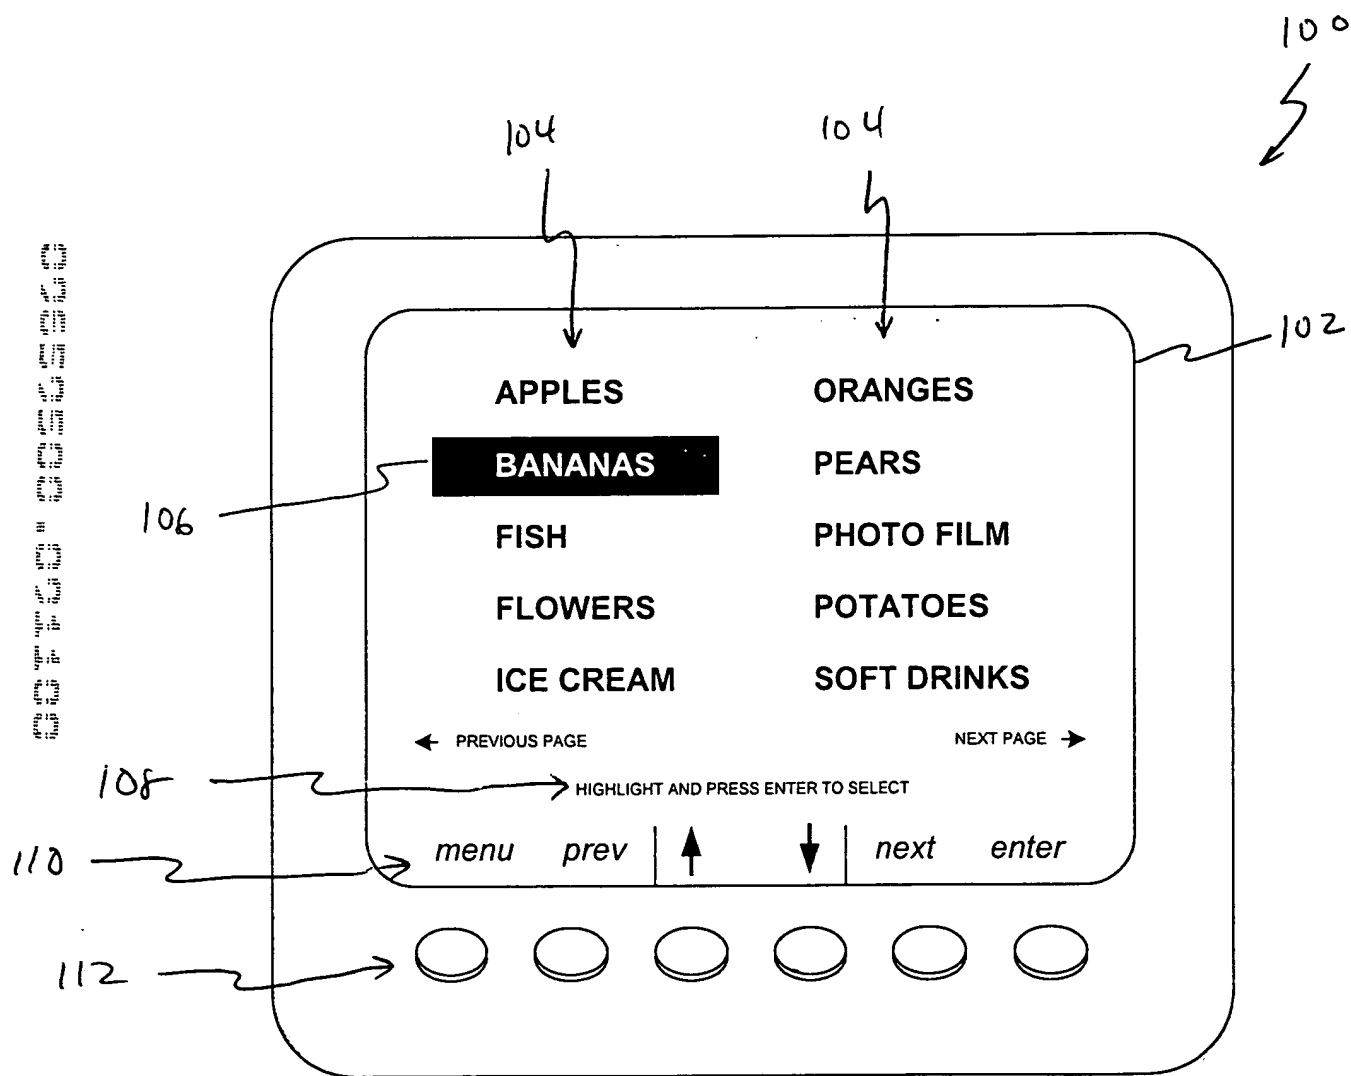


FIG. 4

FIG. 5 is a schematic diagram of a user interface for a device, showing a list of items and a selection mechanism.

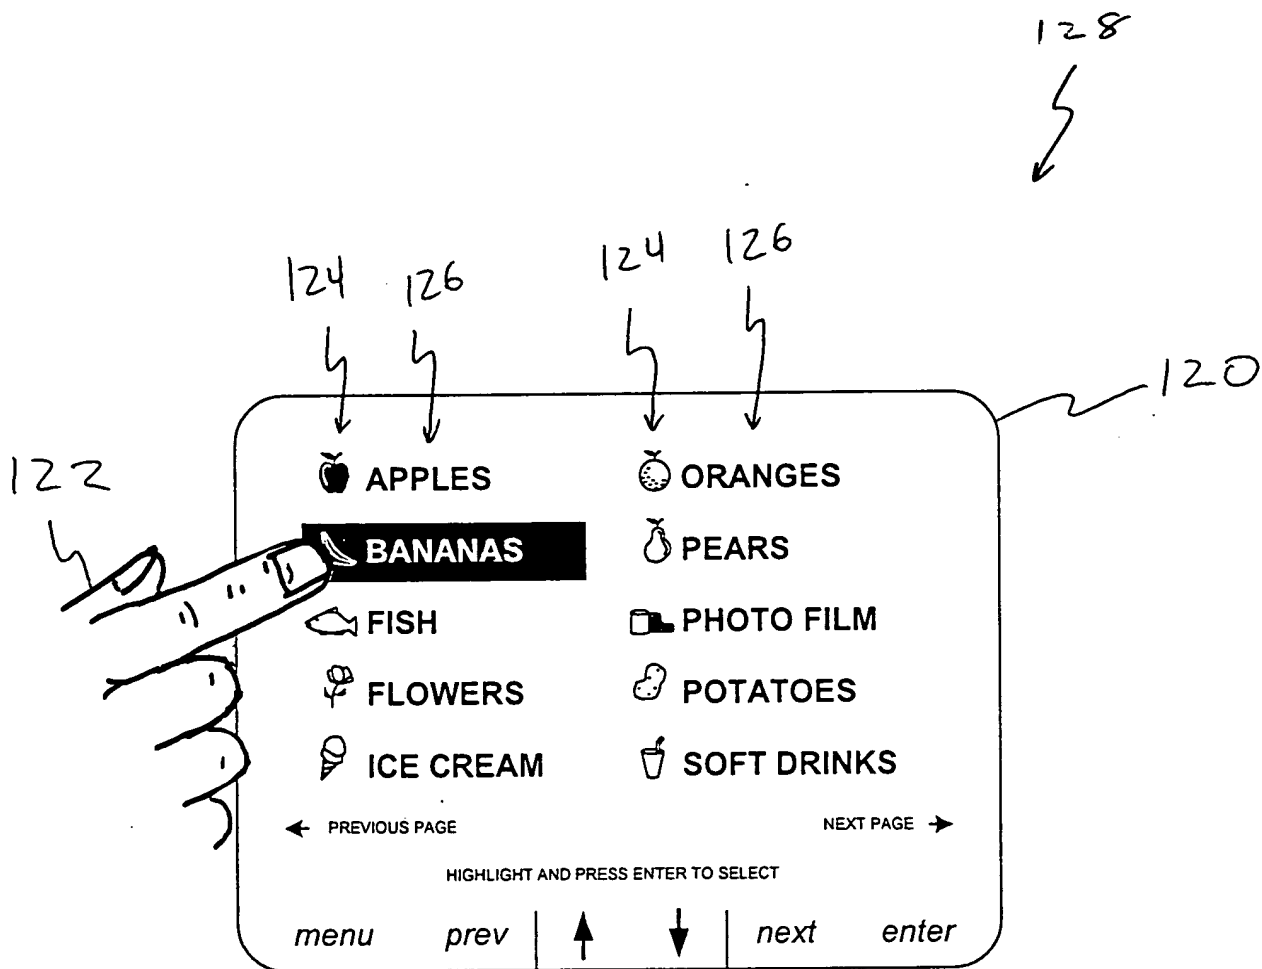


FIG. 5